

Oscilloscopes

## CS-4100A SERIES

40MHz 2-Channel


### CS-4135A

20MHz 2-Channel

### CS-4125A

#### OUTLINE

The CS-4100A Series with excellent cost efficiency were created from a fusion of performance, reliability, operability and design, and realize general-purpose characteristics which can be used in a variety of observations and inspections ranging from very small to very large signals.

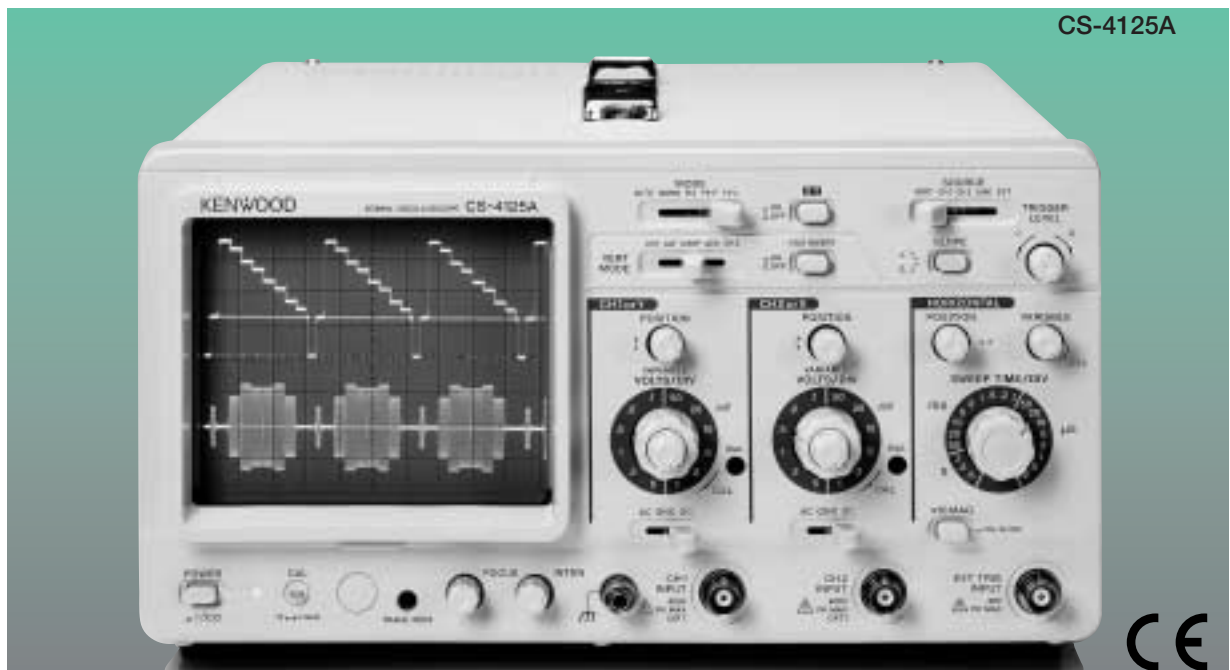


CS-4125A



## CS-4100A SERIES

### FEATURES

#### High reliability with Kenwood Original Hybrid ICs

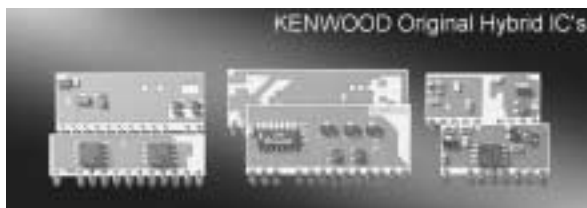

#### High-intensity CRT (12 kV) (with scale illumination)

Large-aperture (150 mm) CRT with post stage acceleration (12 kV) displays bright and sharp waveforms. The internal graticule eliminates parallax in measurement and the scale illumination is convenient for picture shooting and observations under low light (the CS-4125A uses a 2 kV CRT and does not have the scale illumination.)

#### Dynamic range with a headroom for accurate waveform

#### display without distortion

As the dynamic range with a headroom assures the linearity of displayed waveforms, waveforms can be displayed without distortion until the upper limit of the frequency band. The CS-4135A provides a wide frequency bandwidth from DC to 40 MHz (-3 dB) between 5 mV/div to 5 V/div while the CS-4125A provides DC to 20 MHz (-3 dB) with the same sensitivity.

#### High sensitivity of 1 mV/div (DC to 5 MHz)


The vertical axis sensitivity can be varied continually from 1 mV/div to 5 V/div with an attenuator. The 1 mV/div sensitivity is especially powerful in measuring very-low, complicated signals.

#### Maximum sweep rate of 20 ns/div (x10 MAG)

The sweep rate can be varied continually from 0.5 s/div to 0.2 μs/div. The sweep magnification (x10 MAG) allows to magnify the time scale by 10 times with a one-touch operation so that a part of a complicated waveform can be observed in more detail.

#### FIX sync

The FIX sync function cuts off troublesome procedures for synchronization. Much of the preparation work can be omitted so that the measurement or inspection work can be started more quickly.

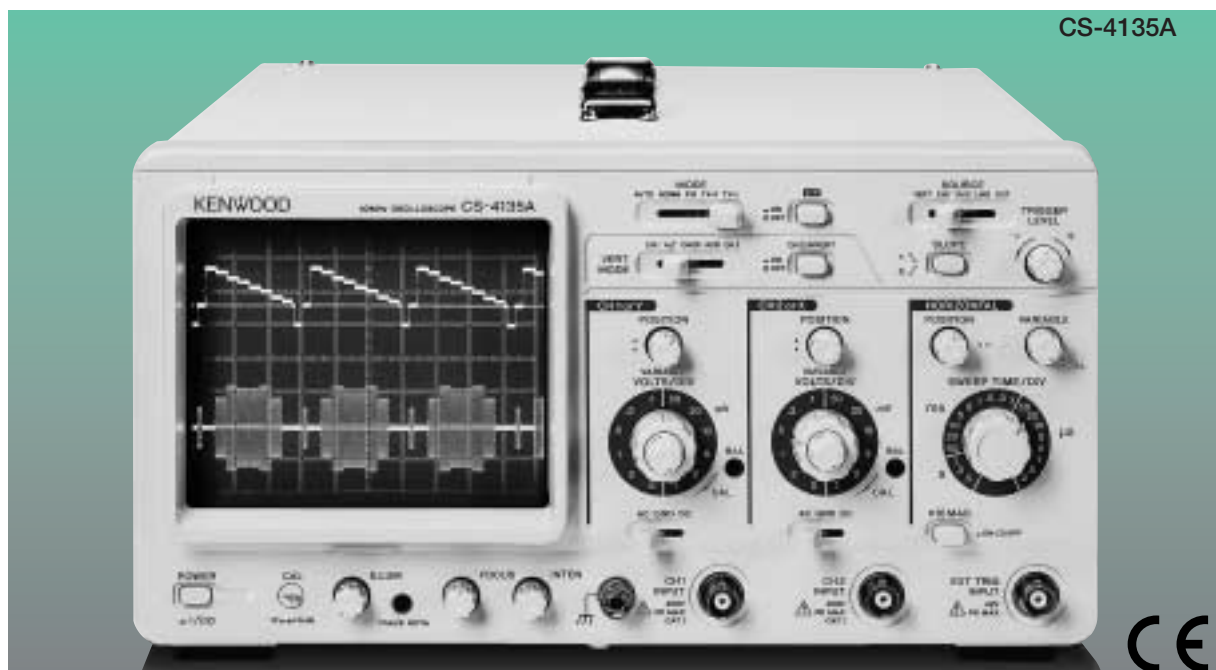


# OSCILLOSCOPES

## One-touch TV sync

The horizontal and vertical video signals can be observed with a one-touch operation. Stable synchronization is assured without the need of synchronizing operation.



Horizontal line TV signal



Vertical line TV signal

## Convenient VERT mode

The VERT mode switches the sweep triggering sources automatically according to the vertical axis mode. When the vertical axis mode is CH1, the CH1 signal becomes the trigger source, and the CH2 signal becomes the trigger source when the vertical axis mode is CH2. In ALT mode, CH1 and CH2 signals can be triggered independently even when they have different frequencies.

## One-touch ALT/CHOP switching

The ALT and CHOP modes can be switched with a one-touch operation in the 2-phenomena mode. This is convenient in phase-related observation of waveforms.

## X-Y Mode

Commences operation as an X-Y oscilloscope with CH1 as the Y-axis and CH2 as the X-axis.

## Vertical axis signal output connector

As this connector outputs the input signal at a rate of 50 mV/div, connecting a frequency counter makes it possible to measure the frequency of a very low signal while observing its waveform.

Waveforms can be observed by applying intensity modulation.

Added or subtracted waveforms can be observed.

The trace inclination can be corrected with the front panel operation.

Relay-type attenuators with long life and excellent operability are used.

## CS-4100A SERIES

## SPECIFICATIONS

Model		CS-4135A		CS-4125A		
CRT : Type		150mm rectangular with internal graticule				
Accelerating voltage		Approx. 12kV		Approx. 2kV		
Effective area		8×10 div. (1div=10mm)				
Vertical axis (Common for CH1, CH2)						
Operating modes		CH1, CH2, ADD, ALT, and CHOP				
Sensitivity		1mV/div to 5V/div (1mV/div., 2mV/div.±5%, 5mV/div to 5V/div. ±3%)				
Attenuator		1-2-5 steps, 12 ranges, and fine adjustment				
Frequency response	DC	DC to 40MHz ( - 3dB) (5mV/div. to 5V/div.)		DC to 20MHz ( - 3dB) (5mV/div. to 5V/div.)		
		DC to 5MHz ( - 3dB) (1mV/div. to 2mV/div.)		DC to 5MHz ( - 3dB) (1mV/div. to 2mV/div.)		
	AC	10Hz to 40MHz ( - 3dB) (5mV/div. to 5V/div.)		10Hz to 20MHz ( - 3dB) (5mV/div. to 5V/div.)		
10Hz to 5MHz ( - 3dB) (1mV/div. to 2mV/div.)		10Hz to 5MHz ( - 3dB) (1mV/div. to 2mV/div.)				
Input impedance		1Mk ±2%, Approx. 23pF				
Rise time		Approx. 8.75ns (40MHz) (5mV/div. to 5V/div.)		Approx. 17.5ns (20MHz) (5mV/div. to 5V/div.)		
		Approx. 70ns (5MHz) (1mV/div to 2mV/div.)		Approx. 70ns (5MHz) (1mV/div. to 2mV/div.)		
Crosstalk		Below - 40dB (at 1kHz sine wave)				
Polarity inversion		CH2 only				
Maximum input voltage		800V p-p or 400V (DC + AC peak)				
CHOP frequency		Approx. 250kHz				
Horizontal axis (CH2 input)						
Operating modes		Switch to X-Y on CH1 : Y-axis / CH2 : X-axis				
Sensitivity		Same as CH2 vertical axis				
Input impedance		Same as CH2 vertical axis				
Frequency response		DC : DC to 500kHz ( - 3dB) / AC : 10Hz to 500kHz ( - 3dB)				
X-Y phase difference		Within 3 degrees at 50kHz				
Sweep : Sweep time		0.2µs/div. to 0.5s/div. ±3%		0.5µs/div. to 0.5s/div. ±3% (0.2µs/div. : UNCAL)		
		1-2-5 steps, 20 ranges, and fine adjustment				
Magnified sweep (×10MAG)		×10, ±5%		×10, ±5% (0.2µs/div. : UNCAL)		
Linearity		±3% (×10MAG : ±5%)		±3% (0.2µs/div.:UNCAL)		
		(×10MAG : ±5%, 20ns/div. : UNCAL)				
Triggering : Trigger sources		VERT, CH1, CH2, LINE and EXT				
Mode		AUTO, NORM, FIX, TV-F and TV-L				
Trigger coupling		AC, TV-F and TV-L				
Sensitivity	NORM	INT	10Hz to 20MHz	1.5div.	10Hz to 5MHz	1div.
		EXT		0.25Vp-p		0.2Vp-p
		INT	20MHz to 40MHz	2div.	5MHz to 20MHz	1.5div.
		EXT		0.3Vp-p		0.3Vp-p
	AUTO	INT	50Hz to 20MHz	1.5div.	50Hz to 5MHz	1div.
		EXT		0.25Vp-p		0.2Vp-p
		INT	20MHz to 40MHz	2div.	5MHz to 20MHz	1.5div.
		EXT		0.3Vp-p		0.3Vp-p
	TV	INT	FRAME, LINE	1div.	FRAME, LINE	1div.
		EXT	LINE	0.2Vp-p	LINE	0.2Vp-p
	FIX	INT	50Hz to 40MHz	2div.	50Hz to 20MHz	2div.
		EXT		0.5Vp-p		0.5Vp-p
External trigger : Input impedance		1Mk, Approx. 23pF				
Maximum input voltage		84V p-p or 42V (DC + ACpeak)				
Calibration voltage		1V p-p±3% (Square wave, 1kHz, positive polarity)				
Intensity modulation : Input voltage		TTL level (dark for positive voltage)				
Input impedance		Approx. 5kK				
Frequency response		DC to 3.5MHz				
Maximum input voltage		84V p-p or 42V (DC + AC peak)				
CH1 Signal output						
Output voltage		Approx. 50mV/div. (loaded 50K)				
Output impedance		Approx. 50K				
Frequency response		100Hz to 20MHz (within ±3dB, loaded 50K)		100Hz to 10MHz (within ±3dB, loaded 50K)		
Trace rotation		Enables trace rotation adjustment from front panel				
Environmental condition		10 to 35 , 85% or less (temperature/humidity for characteristics in spec.)				
Operation conditon		0 to 40 , 85% or less (temperature/humidity for operation)				
Power source		100/120/220/230V AC ±10% (250V AC maximum), 50/60Hz				
Power consumption		30W maximum				
Case dimensions		290 (W) × 150 (H) × 390 (D) mm				
Maximum dimensions		290 (W) × 172 (H) × 443 (D) mm				
Weight		Approx. 6.9kg		Approx. 6.6kg		
Accessories		Instruction manual (1) / Probe (PC-54) (2) / Power cable (1)				